

11.

BESTSELLER

Collection

**PASTEUR
BRAMANTE
MICHELANGELO**

CARPET TILE



CONTESSE

PASTEUR

PASTEUR



PASTEUR 10



PASTEUR 05




PASTEUR 08



PASTEUR 15



PASTEUR 17

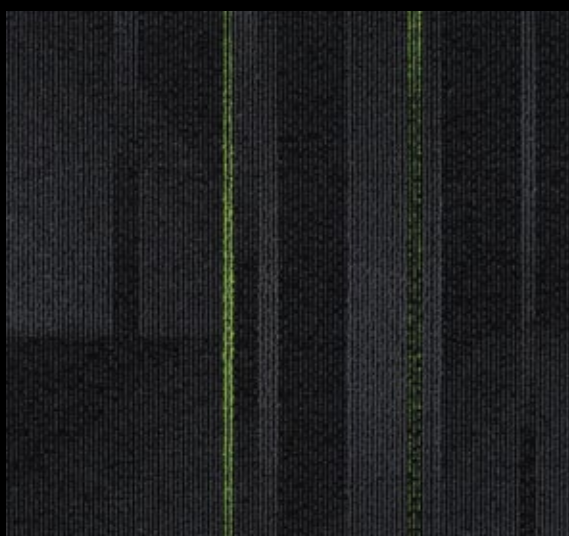

PASTEUR 18

BRAMANTE

MICHELANGELO

PASTEUR 10

PASTEUR

BRAMANTE

MICHELANGELO



PASTEUR 15+18

PASTEUR

BRAMANTE

MICHELANGELO



PASTEUR 08

PASTEUR

BRAMANTE

MICHELANGELO



PASTEUR 18

PASTEUR

BRAMANTE

MICHELANGELO



PASTEUR 15

PASTEUR

BRAMANTE

MICHELANGELO



PASTEUR 10+17

PASTEUR

BRAMANTE

MICHELANGELO



PASTEUR 17

PASTEUR

BRAMANTE

MICHELANGELO



PASTEUR 05



PASTEUR

BRAMANTE

MICHELANGELO

BRAMANTE 3203

PASTEUR

BRAMANTE

MICHELANGELO



MICHELANGELO



MICHELANGELO 78



MICHELANGELO 12



MICHELANGELO 04



MICHELANGELO 06



MICHELANGELO 04+06

PASTEUR

BRAMANTE

MICHELANGELO

BESTSELLER COLLECTION

Product Type

Construction

Size

Yarn Type

Dye Method

Gauge

Pile Weight

Total Weight

Pile Thickness

Total Thickness

Tufts per m2

Backing Foundation

Number of Tiles per Carton

m2 per Carton

Flammability - Radiant Panel

Flammability - Methenamine Pill

Flammability - Smoke Density

Stability - Delamination

Stability - Dimensional Stability

Stability - Tuft Bind

Static Propensity

Color Fastness to Light

Color Fastness to Rubbing

Sound Absorption Coefficient

Impact Sound Transmission

Indoor Air Quality

MICHELANGELO

Tufted Carpet Tile

Level Loop

50 x 50 cm

100 % Polypropylene

Solution Dyed

1/10"

480gr/m2

3200gr/m2

2 mm

5 mm

180.000

Bithumen

24 pieces

6 m2

ASTM E 648 Class II

ASTM D2589 Rating 8

ASTM E 662 Pass

ASTM D3936 >3.0 lbc/in

AACHEN <0.2 %

ASTM D1335 > 8.0 lbs

AATCC I34 < 3.5 kV

AATCC I6 E Rating 6

AATCC I65 Rating 4-5

EN ISO 354 0.15 Class E

EN ISO 140-3 23 dB

GLP 6331/6330

PASTEUR

Tufted Carpet Tile

Multi-Level Loop

50 x 50 cm

100 % Polypropylene

Solution Dyed

1/12"

680 gr/m2

3380 gr/m2

4 mm

6 mm

186.000

Bithumen

20 pieces

5 m2

ASTM E 648 Class II

ASTM D2589 Rating 8

ASTM E 662 <450

ASTM D3936 >3.0 lbc/in

AACHEN <0.2 %

ASTM D1335 > 8.0 lbs

AATCC I34 < 3.5 kV

AATCC I6 E Rating 4-5

AATCC I65 Rating 4-5

EN ISO 354 0.15 Class E

EN ISO 140-3 23 dB

GLP 6331/6330

BRAMANTE

Tufted Carpet Tile

Level Loop

50 x 50 cm

100 % Polypropylene

Solution Dyed

1/10"

580 gr/m2

3300 gr/m2

3 mm

6 mm

180.000

Bithumen

24 pieces

6 m2

ASTM E 648 Class II

ASTM D2589 Rating 8

ASTM E 662 Pass

ASTM D3936 >3.0 lbc/in

AACHEN <0.2 %

ASTM D1335 > 8.0 lbs

AATCC I34 < 3.5 kV

AATCC I6 E Rating 6

AATCC I65 Rating 4-5

EN ISO 354 0.15 Class E

EN ISO 140-3 23 dB

GLP 6331/6330



PASTEUR 10

PASTEUR

BRAMANTE

MICHELANGELO